

AVAILABLE TEXTURES



Sawcut



Handscraped



EIR



Real Wood



BP



Slate

AVAILBALE SIZE INFORMATION

Product category	Thickness range	size
Glue down dry back	1.5mm ; 1.8mm ; 2mm ; 2.5mm 3mm ; 4mm ; 5mm	6'x36' ; 6'x48' ; 7'x48' ; 9'x48' ; 12'x24' ; 18'x18' ; 18'x36' ; 3'x48' ; 9'x36'
PVC Click	4mm ; 4.5mm ; 5mm ; 5.5mm 6mm	6'x36' ; 6'x48' ; 7'x48' ; 9'x48' ; 9'x36'
PVC Loose lay	4mm ; 4.5mm ; 5mm ; 6mm	6'x36' ; 6'x48' ; 7'x48' ; 9'x48' ; 12'x24' ; 18'x18' ; 18'x36' ; 3'x48' ; 9'x36'
SPC Click	3.5mm ; 3.8mm ; 4mm ; 4.5mm ; 5mm 5.5mm ; 6mm ; 6.5mm ; 7mm ; 8mm	6'*36' ; 6'*48' ; 7'*48' ; 9'*48' ; 9'*36'



YS6004-6B



YS6013-7



YS1003-1



YS1004-6



YS1033



YS1037



Ys1081



YS6001-1



YS6001-4



YS6003-3



YS6004-1



YS6004-3



YS6004-4



YS6005-11



YS6006-4



YS6007-5



YS6008-3



YS6008-7



YS6009-1



YS6009-4



YS6010-6



YS6011-3



YS6011-4



YS6011-7



YS6012-1



YS6012-4



YS6005-6



YS6005-6




YS6006-7



YS6008-5



YS6012-7

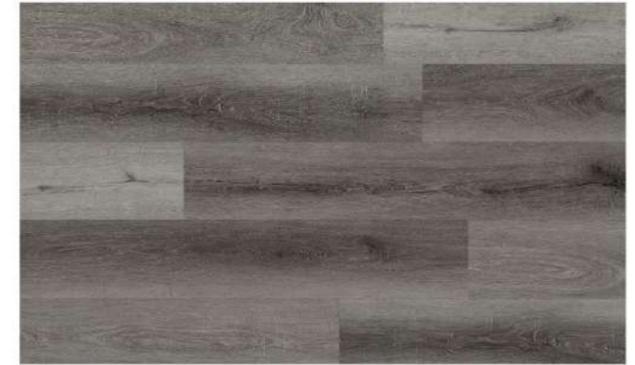

YS6014-1



YS6014-4



YS6014-5



YS6014-8



YS6015-1



YS6016-2



YS6018-7



YS6019-4



YS6020-1



YS6020-3



YS6020-6



YS6020-8



YS6020-10



YS6021-5



YS6022-1



YS6023-3



YS6024-1



YS6024-3



YS6024-4



YS6024-5



YS6024-6



YS6025-4



YS6025-5



YS6009-9



YS6011-4



YS6010-8



YS6012-8



YS6014-14



YS6018-4



YS6025-6



YS6026-1



YS6026-2



YS6026-5



YS6027-1



YS6027-3



YS6027-4




YS6027-6



YS6027-7



YS6028-3

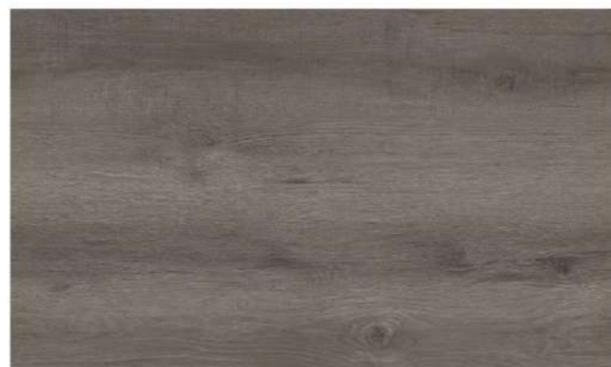

YS6028-4



YS6028-7



YS6028-6



YS6006-4



YS6029-1



YS6029-2



YS6029-3



YS6029-4



YS6029-5



YS6029-6



YS6030-1



YS6030-5



YS6031-1



YS6031-3



YS6018-8-1



YS6031-4



YS6031-6



YS6032-1



YS6032-4



YS6032-6



YS6033A-1



YS6033A-2



YS6033A-3



YS6033A-4



YS6033A-5



YS6033A-6



YS6034B-1



YS6034B-2



YS6034B-3



YS6034B-5



YS6034B-6

TECHNICAL DATA

Factory Test Items	Factory Standards	Testing Method
Appearance		
Flaw, Crack, Wrinkle, Hold, Separating	Not Allowed	GB4085-83
Color Difference	Two Tones Allowed	GB4085-83
Dirt, Color Change	Not Easily Noticeable	GB4085-83
Specifications		
Length Measurement	± 0.1mm(≤6")	EN427
	± 0.3mm(12" ~ 24")	
	± 0.5mm(≥36")	
Overall Thickness	± 0.15mm	EN428
Squareness	≤0.25mm	EN427
Straightness	≤0.25mm	EN427
Physical Statistics		
Dimensional Stability to Heat	≤0.12%	EN434
	(80℃, 6Hrs)	
Curling After Exposure To Heat	≤1.2mm	EN434
	(80℃, 6Hrs)	
Wear Resistance	≤0.015g	EN-660-2
Peel Resistance	≥2.8Kgf/2cm	EN431
Residual Indentation After Static Loading	≤0.1mm	EN434
Flexibility	No Damage	EN435
All products comply to EN 14041:2004 Safety Standards		
Product Specifications	Standard	Testing Method
Reaction to Fire	Class Bf1-s1	EN717-1
Formaldehyde Emission	Not Detected	EN717-1
Slip Resistance	Class DS	EN13893
Determination of migration of heavy metals	Not Detected	EN71
Effect of a caster chair	Pass	EN425
Color Fastness to Light	Grade(Blue Wool Std):6	EN ISO 105 B02